


## OCAL-BLUE Double-Coat Unions



UNY and UNF unions are installed in threaded thick-wall conduit systems in hazardous areas. UNY unions are used to connect conduit to a conduit fitting, junction box, or device enclosure. UNF unions are used to connect conduit to conduit, or to provide a means for future modifications to the conduit system.

- Double coated with a nominal .002" (2 mil) blue urethane on both the interior and exterior, before PVC coating is applied.
- A minimum of .040" (40 mil) PVC coating is bonded to the exterior.
- Pressure-sealing sleeves to protect the connection.

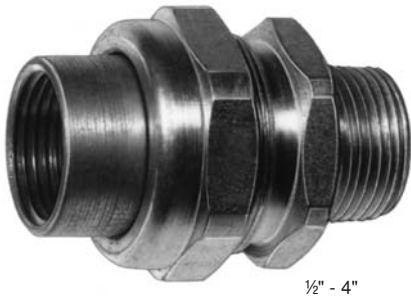

1/2" - 4"



5" - 6"

UNY Male

(Fittings shown uncoated)



1/2" - 4"

UNF Female



5" - 6"

### Conduit Unions

Inches	Pipe Size		UNF Cat. No.	UNY Cat. No.
	Inches	Metric Size Designator*		
1/2		16	UNF105	UNY105
3/4		21	UNF205	UNY205
1		27	UNF305	UNY305
1 1/4		35	UNF405	UNY405
1 1/2		41	UNF505	UNY505
2		53	UNF605	UNY605
2 1/2		63	UNF705	UNY705
3		78	UNF805	UNY805
3 1/2		91	UNF905	UNY905
4		103	UNF1005	UNY1005
5		129	UNF012	UNY012
6		155	UNF014	UNY014

\* Metric size designator (ANSI C80.1-1994).

Cat. No.	Color
<b>LB17</b>	<b>G</b>
G = Gray, R = Red, W = White, B = Blue	
* Custom Colors Available	