


## Ordinary Location Fittings

The Ultimate Liquidtight Solution for Corrosive Environments!

### Ocal™ PVC-Coated Liquidtight Conduit Connectors

- Nominal 0.040 in. (40 mils) PVC coating bonded to exterior
- Pressure-sealing sleeves are designated to protect the connection
- Ocal™ uses only genuine T&B® liquidtight fittings to ensure quality installations

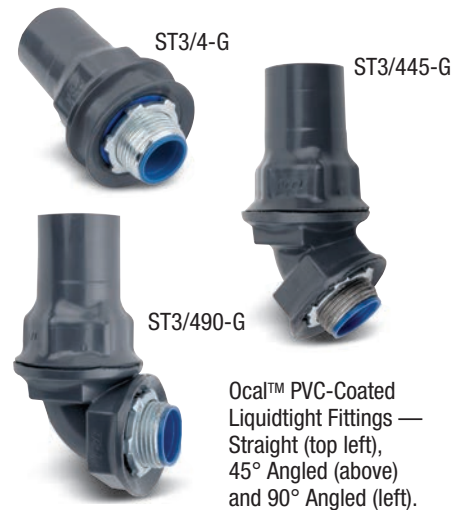

PVC-Coated Steel Straight Cat. No.	PVC-Coated Aluminum Straight Cat. No.	PVC-Coated Steel 45° Cat. No.	PVC-Coated Steel 90° Cat. No.	PVC-Coated Aluminum 90° Cat. No.	Pipe Size in. (mm)
ST3/8- <u>  </u>	ST3/8SA- <u>  </u>	ST3/845- <u>  </u>	ST3/890- <u>  </u>	ST3/890SA- <u>  </u>	3/8 (10)
ST1/2- <u>  </u>	ST1/2SA- <u>  </u>	ST1/245- <u>  </u>	ST1/290- <u>  </u>	ST1/290SA- <u>  </u>	1/2 (16)
ST3/4- <u>  </u>	ST3/4SA- <u>  </u>	ST3/445- <u>  </u>	ST3/490- <u>  </u>	ST3/490SA- <u>  </u>	3/4 (21)
ST1- <u>  </u>	ST1SA- <u>  </u>	ST145- <u>  </u>	ST190- <u>  </u>	ST190SA- <u>  </u>	1 (27)
ST1-1/4- <u>  </u>	ST1-1/4SA- <u>  </u>	ST1-1/445- <u>  </u>	ST1-1/490- <u>  </u>	ST1-1/490SA- <u>  </u>	1-1/4 (35)
ST1-1/2- <u>  </u>	ST1-1/2SA- <u>  </u>	ST1-1/245- <u>  </u>	ST1-1/290- <u>  </u>	ST1-1/290SA- <u>  </u>	1-1/2 (41)
ST2- <u>  </u>	ST2SA- <u>  </u>	ST245- <u>  </u>	ST290- <u>  </u>	ST290SA- <u>  </u>	2 (53)
ST2-1/2- <u>  </u>	ST2-1/2SA- <u>  </u>	ST2-1/245- <u>  </u>	ST2-1/290- <u>  </u>	ST2-1/290SA- <u>  </u>	2-1/2 (63)
ST3- <u>  </u>	ST3SA- <u>  </u>	ST345- <u>  </u>	ST390- <u>  </u>	ST390SA- <u>  </u>	3 (78)
ST4- <u>  </u>	ST4SA- <u>  </u>	ST445- <u>  </u>	ST490- <u>  </u>	ST490SA- <u>  </u>	4 (103)

Cat. No.	Material	Colour
ST3/4-	- Blank = Steel/Iron SA = Aluminum	- = space for colour identifier
		G = Grey
		W = White
		B = Blue
		R = Red

Custom colours also available - Std. min. quantities are required. Please contact your Regional Sales Office.